

Specifications


Class of Operation	Model LXL – UL 325 Class I, II, III, IV
Type of Gate	Vehicular Slide Gates Only
Drive System	Hydraulic with Aluminum Drive Rail
Duty	Continuous
Speed	1 ft. per second
Entrapment Protection	Primary – Inherent entrapment sensing system (Type A)
	Secondary – Provisions for connection of a monitored non-contact sensor (Type B1) and/or a monitored contact sensor (Type B2)


Models	Voltage	Phase	Amps	Max Gate Weight	Max Gate Opening	Install Class	Travel Speed	Duty Cycle Rating	Unit Weight
LXL-3001-1151	115	1	15	3000	90	I-IV	1.0 ft/s	Continuous	250
LXL-3001-2301	208/230	1	9	3000	90	I-IV	1.0 ft/s	Continuous	250
LXL-3001-2303	208/230	3	5	3000	90	I-IV	1.0 ft/s	Continuous	250
LXL-3001-4603	460	3	3	3000	90	I-IV	1.0 ft/s	Continuous	250

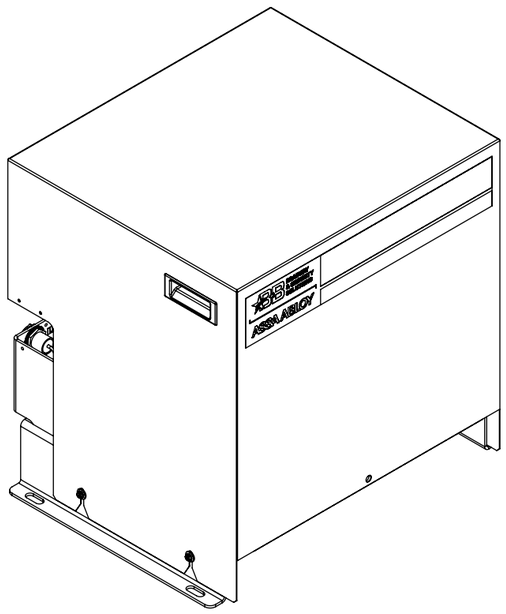


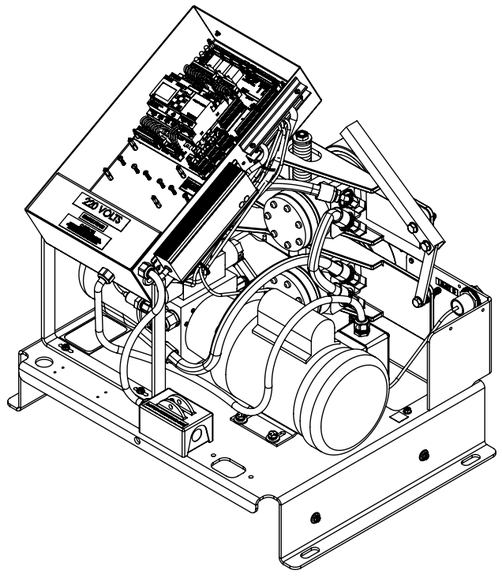



NOTE:
1. ALL INSTALLATIONS SHOULD COMPLY WITH ASTM F2200 ON GATE SAFETY.
2. FOLLOW MANUFACTURERS RECOMMENDATION FOR INSTALLATION.
3. DRAWING NOT TO SCALE.





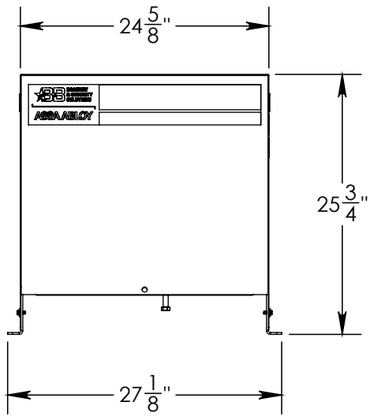

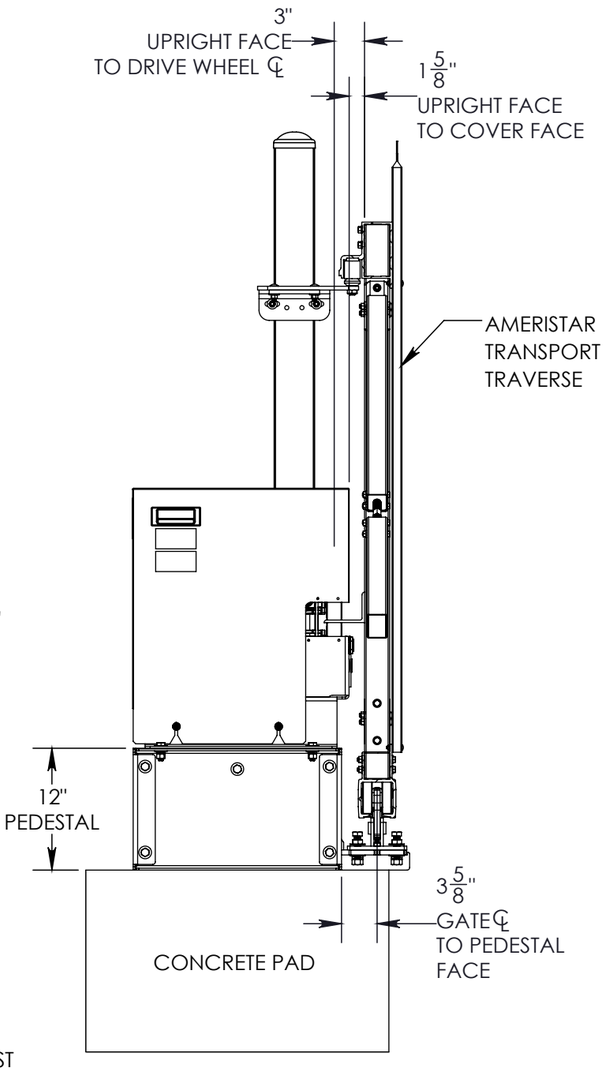

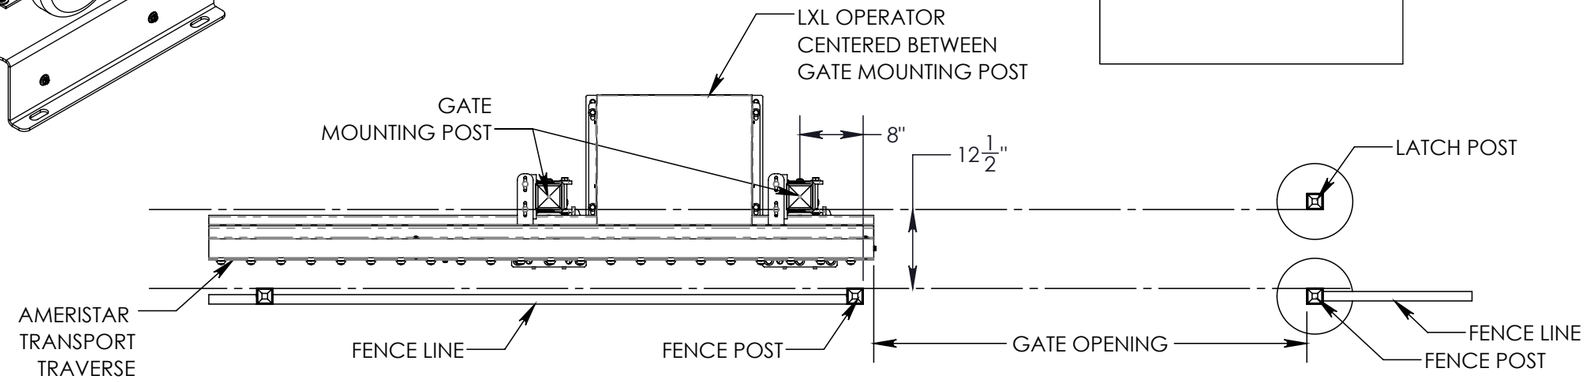

REV. A 8/2024

LXL HYDRAULIC SLIDE GATE OPERATOR