
NOTES:

- 1. CONTRACTOR TO VERIFY ALL DIMENSIONS. FACTORY CANNOT ASSUME ALTERATION COSTS AFTER FINAL SUBMITTAL DRAWINGS HAVE BEEN APPROVED.
- 2. HOUSING, SIDE ARM TUBES, AND COUNTERWEIGHTS TO BE HOT DIP GALVANIZED.
- 3. STEEL OPERATOR TO HAVE DOORS IN FRONT AND BACK (ROADWAY AND COUNTERWEIGHT END).
- 4. STEEL BOLLARD TO HAVE DOOR IN BACK.
- 5. GALVANIZED ANCHOR BOLTS & TEMPLATE. (Ø1.125-7 UNC X 2'-9" LONG).
- 6. GASKET OR SILICON TO BE PLACED BETWEEN PIVOT PLATE ASSEMBLY & HOUSING TOP PLATE.
- 7. PRODUCT NAMEPLATE SHALL BE LOCATED ON INSIDE SURFACE ON DRIVE STANCHION ASSEMBLY.
- 8. CABLE TO LOOP THROUGH 4" NOM PIPE.
- 9. .188" TRUSS CABLES WITH TURNBUCKLES, 2 PLACES.
- 10. BARRIER ARM TO HAVE RED & WHITE REFLECTIVE STRIPES 16" WIDE AT 45°.
- 11. PRODUCT SHOWN MAY HAVE OPTIONAL COMPONENTS INSTALLED.

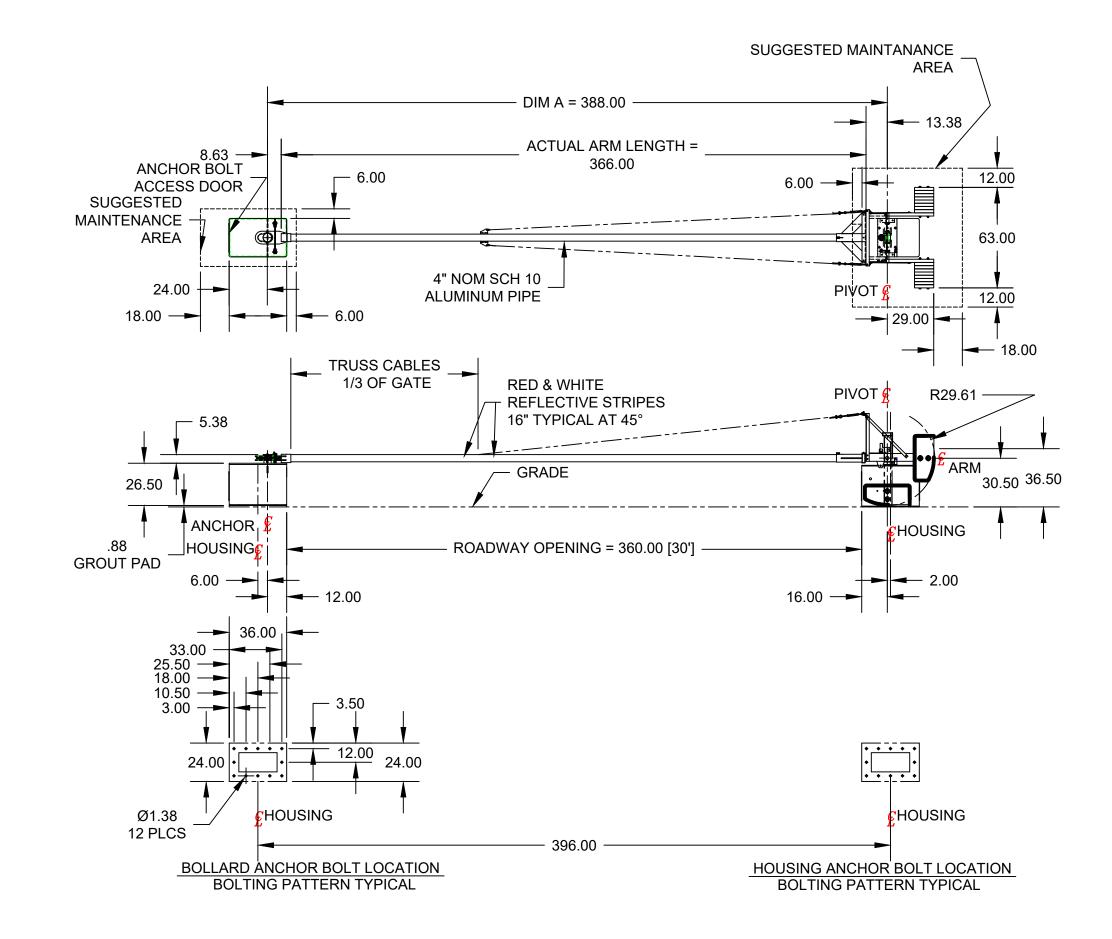

Approval:			ASSA ABLOY	CR25M BARRIER CLEAR OPENING = 30'-0"	Proj No:	Proj No:	
Prog:	Model No: CR25M-360N	REV -	B&B Roadway and Security Solutions McKinney	CLEAR OPENING = 30'-0" ALL BLACK	REV -	SH: 1 OF 1	